

# PRESTIGE<sup>®</sup>

SIDING



*performance* **DRIVEN**

**VYTEC<sup>®</sup>**

\*Redwood

\*Smokestone

\*Harbour

Lakeshore Blue

Spring Meadow

\*Forest

Autumn Leaf

\*Rustic Oak **NEW**

\*Shoreline

Canyon Ridge

Rustic Clay

Castle Stone

Tundra Moss

Twilight Gray

Clipper Gray

Autumn Ash

Sierra Brown

Maplewood

Desert

Antique Ivory

Irish Linen

White

# PRESTIGE<sup>®</sup> SIDING




## Make Your Home **ONE-OF-A-KIND**

Designing your home's exterior is a great chance to express your personal sense of style. With Prestige<sup>®</sup> siding from Vytec, finding the right color and style is simple. And you can rest assured that you're choosing siding built to last.

### **\*Expressions<sup>®</sup> Colors – Express Yourself with Bold Color!**

This rich, bold palette of deep colors, using TruColor<sup>®</sup> technology, that give your home a striking new look.

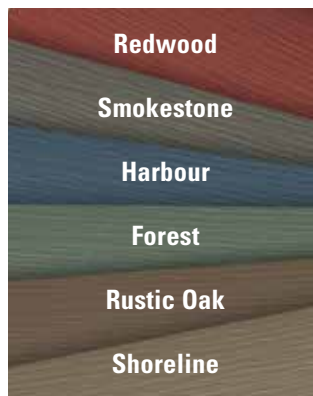

### **Colors that last**



TruColor<sup>®</sup> Protection Technology exclusive color protection ensures that your siding color will stay true year after year.

#### **Tips for choosing siding colors**

- Light colors to make your home look larger.
- Darker colors for a more dramatic exterior look.
- Lighter wall color with a darker accent color to call attention to details like dormers.
- Choose a siding that complements your roof color.

Colors throughout this brochure are simulated. Consult product samples before final selection.

# THE ANATOMY OF PRESTIGE SIDING

Performance-enhancing Features and a Lifetime of Great Looks

## Double-thick nailing hem

adds strength where the panel is attached to the wall, resisting wind loads and helping to smooth wall irregularities.




## Posilok® locking system

holds panels securely, while allowing expansion and contraction in changing temperatures.





## Deep Panel projection

creates enhanced shadow lines with the look of real wood:  
 Double 4-1/2" Traditional is **9/16"**,  
 Double 4-1/2" Dutch Lap is **1/2"**,  
 Double 5" Dutch Lap is **5/8"**.




**.044" thickness** offers lasting strength, while precise dimensional consistency ensures a snug fit and tight laps.

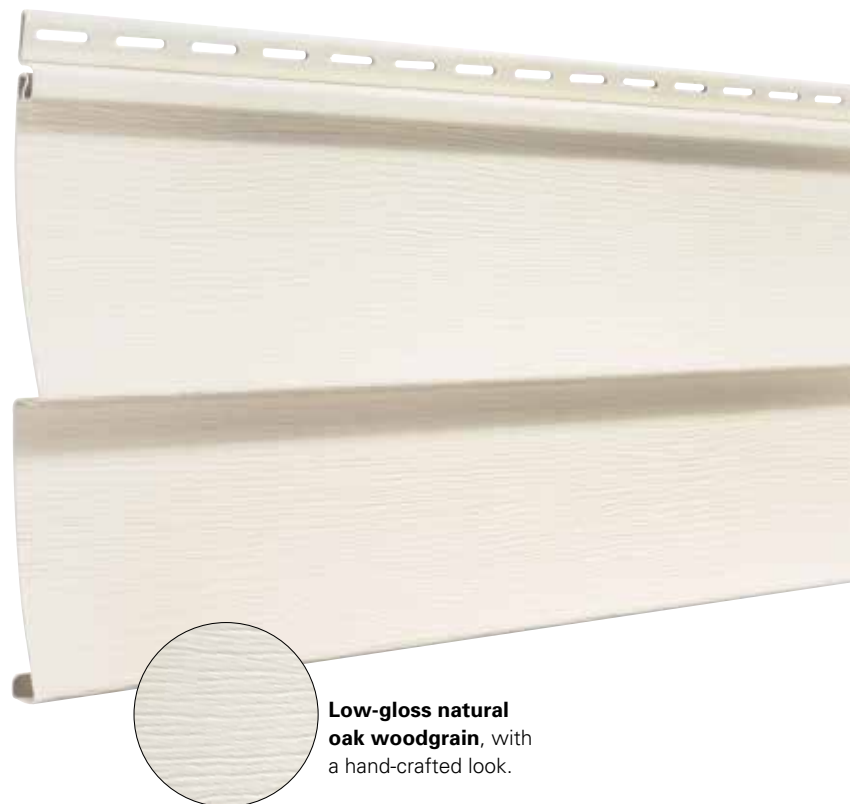


**Low-gloss natural oak woodgrain**, with a hand-crafted look.

## Vytec Prestige® siding panels come in three profiles:




### Double 4-1/2" Traditional Clapboard

Exposure: 9"  
 Length: 12' 11-1/8"



### Double 4-1/2" Dutch Lap

Exposure: 9"  
 Length: 12' 11-1/8"



### Double 5" Dutch Lap

Exposure: 10"  
 Length: 12' 11-1/2"

## Vytec Prestige® Siding Specifications:

### Certificate of Conformance

This certificate of conformance is provided to assist the architect or specifier of Prestige® siding. This siding is intended solely for the sidewall applications for new construction exteriors, remodeling projects or as replacement siding for existing structures, including residential and light commercial applications.

### Product Specifications

All products meet or exceed the Standard Specification for Rigid PVC Siding (ASTM D-3679) and its referenced documents. An independent laboratory, through unannounced inspections of all manufacturing facilities, verifies the conformance to this specification. ASTM D-3679 is the specification used by building code authorities. Where not defined in ASTM D-3679, our products also meet the stringent quality control standards of Vytec.

### Product Test Data

Static windload test pressure: 58.3 PSF  
 Basic wind speed: 212 MPH\*

### Fire Resistance

Vytec vinyl siding, soffit and accessories have a Class A flame-spread classification per 2015 International Building Code, when tested in accordance with ASTM E-84.

### Relevant Codes and Regulations Compliance

Conforms to ASTM Specification D-3679  
 2015 International Building Code (IBC)  
 ICC Evaluation Service Report ESR-1066.

**Color:** Uniformity is spectrophotometrically controlled

**Gloss:** Uniformity is controlled with 75° glossmeter

**Lock:** Optically measured and controlled

\*The MPH wind speed reported above is calculated using the VSI Windspeed Calculation Guidelines. It is an estimate of wind speed resistance given one uniform set of assumptions. Please note that vinyl siding is a decorative covering that is not intended to provide structural reinforcement to a wall. The wind resistance of a wall system may be less than the maximum wind speed rating for a siding product and will not be increased as a result of vinyl siding.



## COMPLETE THE PICTURE WITH FINISHING ELEMENTS™

Accessories like corner posts and soffit are essential to any vinyl siding installation. But adding elements like shakes, beaded porch panel and board & batten can take your home's exterior design up a notch.



**Shakes** are panels with the look of hand-cut cedar



**Beaded porch panel** provides an authentic look to porch soffit



**Board & Batten** offers a timeless look for traditional and contemporary homes



**Accessories** complement any vinyl siding installation



## THE PROS TRUST VYTEC

When it comes to the products they sell, your contractors make their choices as carefully as you would. That's why they choose vinyl siding from Vytec. We stand behind the products we make. Continued advancements make us a manufacturer you can rely on for innovative, high performing products. It's this dedication to our craft that makes Vytec a partner your contractor can trust – and one you can trust, too.