

VINYL SOFFIT



DURABILITY, EASY CARE AND FRESH GOOD LOOKS

- Easy-care vinyl never needs painting because it won't rot, peel or flake like wood.
- Vented soffit circulates air and can help improve a home's energy efficiency.
- Solid soffit adds an attractive finishing touch when ventilation isn't needed.
- A selection of sizes and colors provides design flexibility.
- Varying Profiles available, Including: Triple 3-1/3" Hidden Vent panel, Triple 4" and Double 5" Profiles.

MADE TO ENDURE



WOLVERINE
by certainteed

VINYL SOFFIT

QUICK FACTS:

Double 5" Select Soffit

Profiles: Double 5" Solid and Full Vent

Exposure: 10"

Ventilation: Perforated Full Vent
(NFA 6.4 sq. in./ft.)

Panel Projection: 7/16"



Thickness: 0.040"

Length: 12'

Packaged: 2 squares/carton

Finish: Brushed

Colors: 5

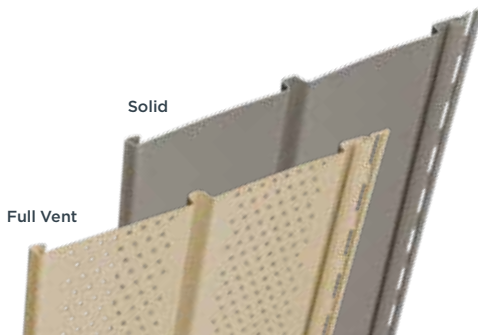

QUICK FACTS:

Triple 4" Soffit

Profiles: Triple 4" Solid, Full Vent and Center Vent

Exposure: 12"

Ventilation: Perforated Full Vent
(NFA 5.9" sq. in./ft.)
Perforated Center Vent
(NFA 2.0" sq. in./ft.)

Panel Projection: 7/16"


Thickness: 0.036"

Length: 12'

Packaged: 1.92 squares/carton

Finish: Matte

Colors: 5

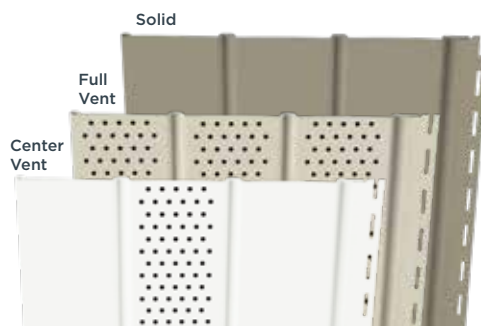

QUICK FACTS:

Triple 3-1/3" Soffit

Profiles: Triple 3-1/3" Solid and Hidden Vent

Exposure: 10"

Ventilation: Hidden Vent (NFA 9.65 sq. in./ft.)

Panel Projection: 5/8"


Thickness: 0.040"

Length: 12'

Packaged: 2 squares/carton

Finish: Matte

Colors: 2



SPECIFICATIONS:

Certificate of Conformance

This certificate of conformance is provided to assist the architect or specifier in the specification of Vinyl Soffit Panel for remodeling projects or as replacement siding for existing structures, including residential and light commercial applications.

Product Specifications

Meets or exceeds the Standard Specification for Rigid PVC Soffit (ASTM D-4477) and its referenced documents. Where not defined in ASTM D-4477, our products also meet the stringent quality control standards of Wolverine.

Product Test Data

Impact resistance: mean failure energy >45 in. lb.

Surface distortion: None at 120°F

Squareness: <1/8" of square

Length: Within -1/4" of specification

Warp/camber: <1/8"

Fire Resistance

Wolverine vinyl siding, soffit and accessories have a Class A flame spread classification per 2018 International Building Code, when tested in accordance with ASTM E-84.

Relevant Codes and Regulations Compliance

Conforms to ASTM Specification D-4477

Color: Uniformity is spectrophotometrically controlled

Gloss: Uniformity is controlled with a 75° glossmeter

Lock: Optically measured and controlled

*Cover House: Triple 3-1/3" Hidden Vent in white